



UNIK4750 - Measurable Security for the Internet of Things

L4 – Smart Grid and AMS

György Kálmán,
DNB/UiO
gyorgy.kalman@its.uio.no

Josef Noll
UiO
josef.noll@its.uio.no

<https://its-wiki.no/wiki/UNIK4750>, #IoTSec, #IoTSecNO

Overview



- Recap: value chain and attack surface
- Electric grid
- Smart grid
- Smart metering
- Situation in Norway

TEK5530: Lecture plan



- 17.01 L1: Introduction
- 24.01
 - L2: Internet of Things
- 31.01
 - L3: Security of IoT + Paper list
- 07.02
 - L4: Smart Grid, Automatic Meter Readings
 - L5: Service implications on functional requirements
- 14.02
 - L6: Technology mapping
 - L9: Implementing critical security controls in industry
- 21.02 --- Winter holiday
 - «homework» see recording of
- L7: Practical implementation of ontologies
- 28.02
 - L8: Paper analysis with 25 min presentation
 - L10: System Security and Privacy analysis
- 07.03
 - L13: Communication and security in current industrial automation
 - L14: Cloud basics and cloud architecture
- 14.03
 - L11: Multi-Metrics Method for measurable Security
 - L12: Multi-Metrics Weighting of an AMR sub-system
- 21.03
 - L15: Cloud security, IoT and service examples from AWS
 - L16: Cloud monitoring, automation and incident response
- 28.03
 - L18: Selected recent topics from IoT security
 - L19: Wrap-up of the course
- 04.04 ---- No lecture, prepare for exam, consultation possibility
- 11.04 ---- No lecture, prepare for exam, consultation possibility or Exam (depending on what we agree on)
- 18.04 ---- Easter holiday, no lecture
- 25.04 ---- Exam (depending on decision about exam on the 11th)

Recap: Attack surface

- It's not about the device. One shall see the big picture
- Structured approach with well-known steps: e.g. securing a web interface, analysis and setup of protocol parameters (e.g. avoid fallback to weak crypto), analysis of data to select correct protection
- Insecure network services: unfortunately, typical for industrial applications
- Transport encryption: use appropriate technological solutions
- Cloud interface
- Mobile interface
- Appropriate granularity in security configuration: e.g. monitoring, logging, password and lockout parameters
- Insecure software
- Physical security

Electric grid





- Nation/continent-wide critical infrastructure
- Synchronized from production to consumer
- Key to most services of the society
- Reaches in practice every home and installation
- Very conservative (that's very much understandable!)
- Was always kind of smart, the difference is in:
 - Resolution and timeliness of data
 - Use of IT
 - Ratio between consumers and producers




Electric grid – contd.

- traditional electric grid vs. smart grid, figure from ABB

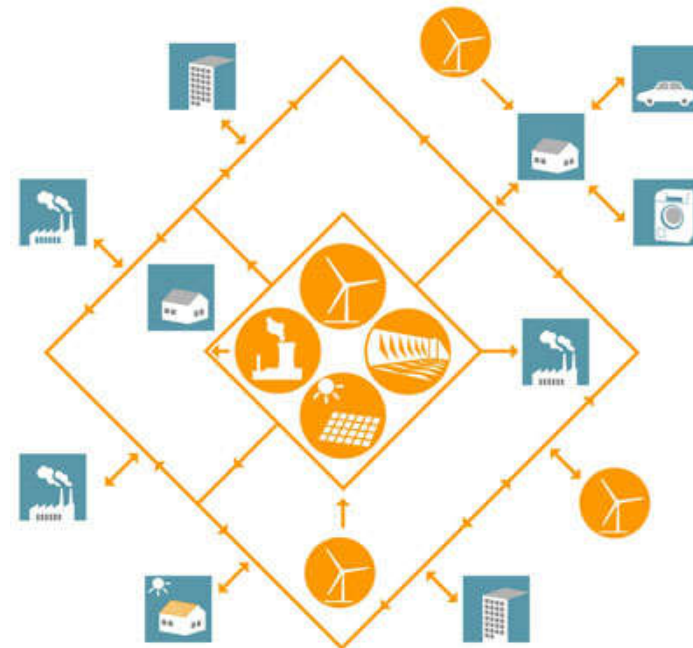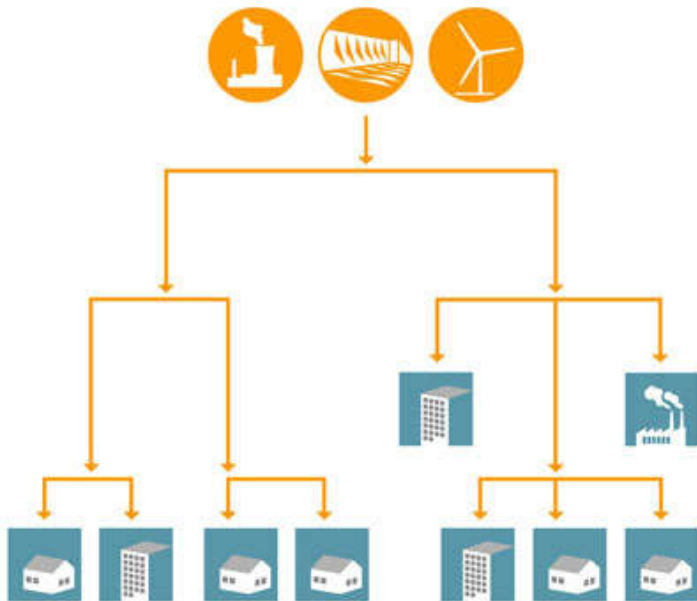

Smart Grid

- Motivation to build a smart grid: save on investments, higher profit rate, better stability, renewables, some cost reduction in employees
- Possible new services based on acquired data (big data)
- Operational stability
 - Integration of the volatile production of renewables
 - Synchrophasor operations
 - Microgrids – possibility for island operation – internet-like operation
- Higher electricity price for households
 - Can lower the pressure on the network for consumer peak hours
 - Can enable new services to be delivered by the utility
- Relevance for Norway:
 - Easy-controllable water plants
 - Low investment rate 90s-2000s

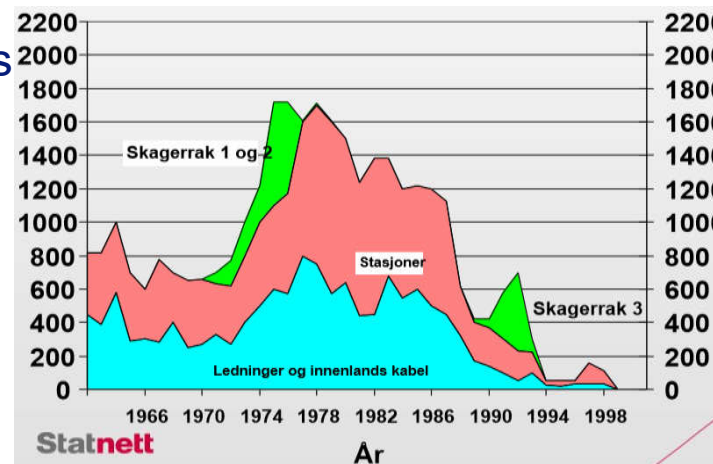


Two figures from NVE




6.5 Totale forventede investeringer i nettet

Figur 22 sammenstiller Figur 13, Figur 18 og Figur 21 for å gi et bilde av alle forventede investeringer i kraftnettet de neste ti årene.

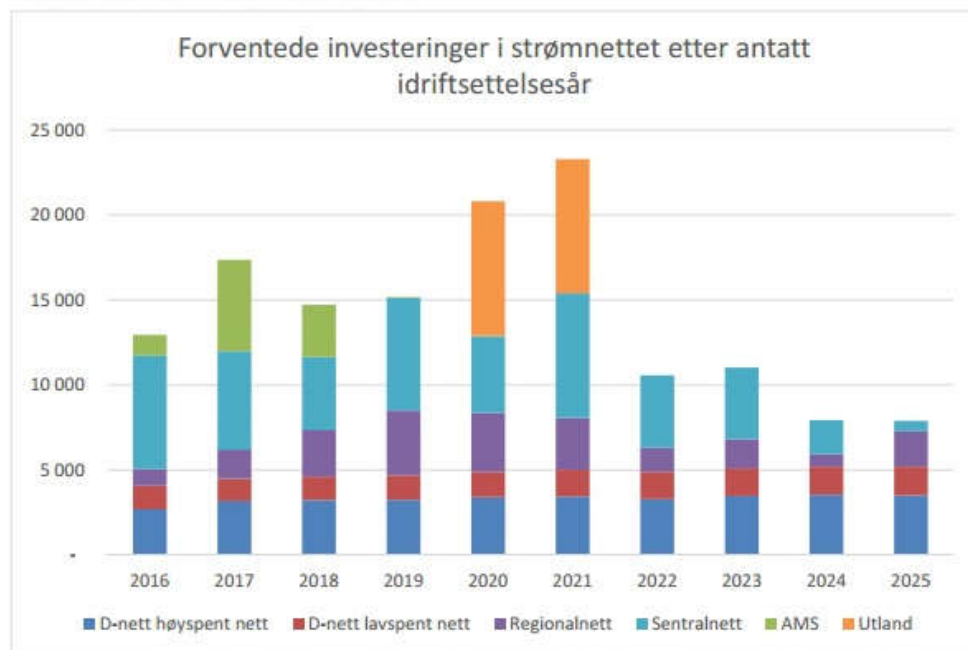

Figur 22 Totale investeringskostnader i Norges strømnnett etter idriftsettelsesår.

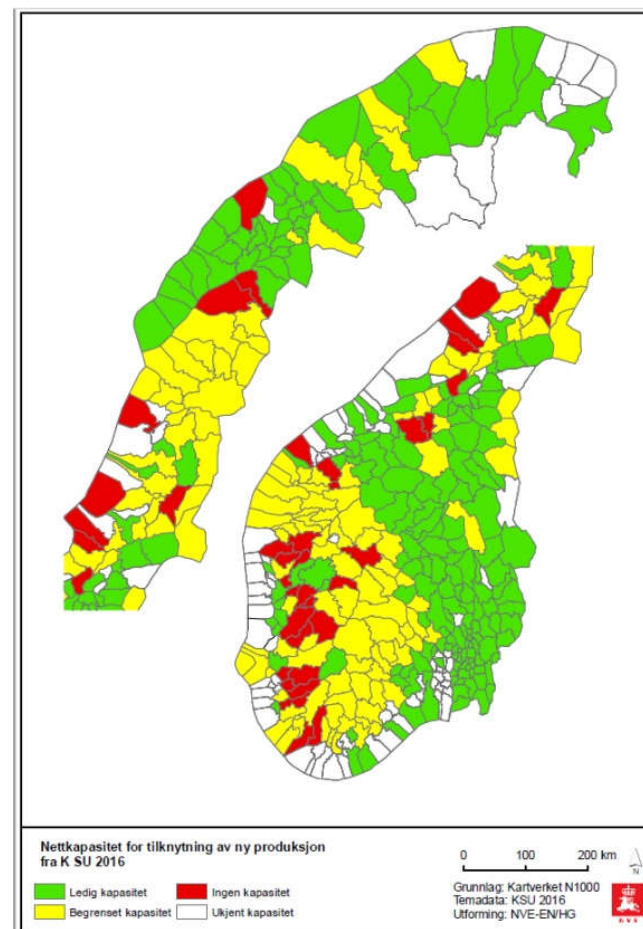

Figur 12 Oversikt over kommunenes kapasitet for ny produksjon.

Smart Grid – contd.

- Technological points:
 - Network control has continuous and real time picture of the network (compare to IT networks)
 - Multi-directional power flow – in practice it might not, implementation-dependent, but for sure a lot of generation plants compared to traditional grid
 - Not just monitoring, but direct control down to the end nodes
- Risk analysis and management
 - Clear, real time data with high resolution – this is new
 - Big data with correlation to e.g. weather, measurement data from neighbours, renewable prediction
 - Soft (price) and hard (switch off) measures to deal with high risk situations
 - Clear, high resolution, processed documentation of grid history – potentially high value
- Economics
 - Until now, small consumers were saved from the swings in the power-spot price
 - Cutting peaks reduces investment needs in distribution and core
 - Might lead to some reduction (I don't expect that)
 - Has a social aspect with e.g. prepaid power, free hours etc.

Smart Grid – technology challenges

- Time synchronization
 - Key in protection, control, monitoring
 - GPS or distributed signal
- Communication
 - Wired in parallel with the core network
 - Partly also with the distribution
 - Wireless or powerline to consumer – active research area: multihop, 5G
 - Licensed or unlicensed band, mesh, zigbee, ISA100 using e.g. 6LoWPAN
 - Quality of Service
 - Translation of engineering requirements to network metrics
- Security and privacy
 - Remote switch-off is required functionality – annoying if a bot is doing it
 - High resolution data with unlimited history on use (tax on company car because of road toll logs)

Advanced Metering Systems

- History: smart metering was present for big consumers since more than a decade, power factor corr.
- Now moving to the household, required by law (in Norway)
- Adds new possibility for load control: consumer (AMS), generation, big consumers, energy storage
 - Operations central (at grid control) [load control] – operations central (at local power utility) [load control] – consumer [smart meter with remote switch-off]
- Meter components
 - Tamper resistance is key (both for utility and consumer)
 - CPE with potentially one interface in home network (home automation) and utility (reporting)
 - Firewall? Future proofing? Ownership on traffic? Availability requirements?
 - Health-Safety-Environment



Advanced Metering Systems – assessment

- CPE: not within secured perimeter from the utility viewpoint, access needs cooperation from consumer
- consumer has no control on communication towards the utility
- Disassembly and probing already possible with a few hundred EUR investment scope, logic analyzer, a bit better soldering iron, cables, devel. circuit board
- In addition: analysis of the communication, analysis of the radio spectrum (if radio is used)
- From communication side: CLI, webinterface, multiple communication interfaces, limited resources in the device, will be the same for a decade or more
- Potentially millions of devices of same type
- Services (maybe the main point for customer satisfaction):
 - Opens communication with the AMS through the internet
 - Maybe also third party
 - Breaches here _will have_ a physical dimension



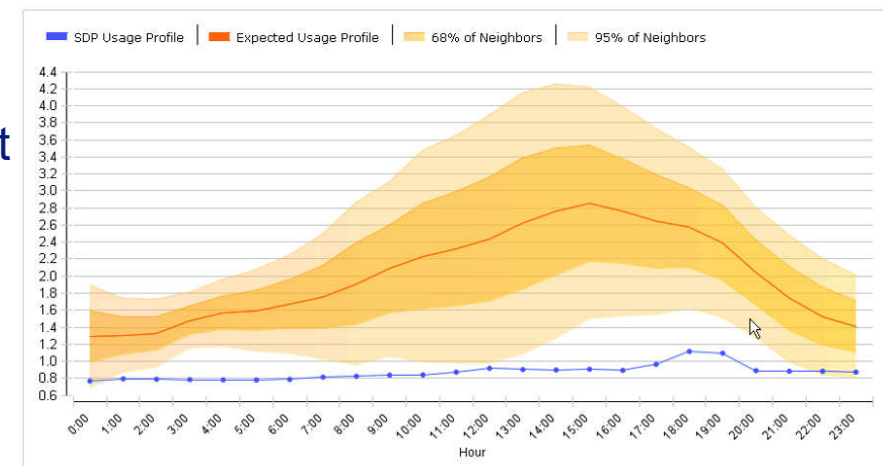


Figure from Siemens

Advanced Metering Systems – Network security

- Utility and consumer can't trust each other
- Isolation of the AMS system from the rest of the utility
- Communication policies and configuration – segmentation, firewalling, patches
- Who owns the network?
- How to run an IDS/IPS in this infrastructure?
- How to monitor the whole system?
- Integration of data placed in common server area
- Best practice: test, preprod, prod environments
- Incident handling with heuristics
- Trusted external provider and/or detailed SLAs
- Attack surface again: CLI, webif, remote management, home automation, consumer services, data history, shared services

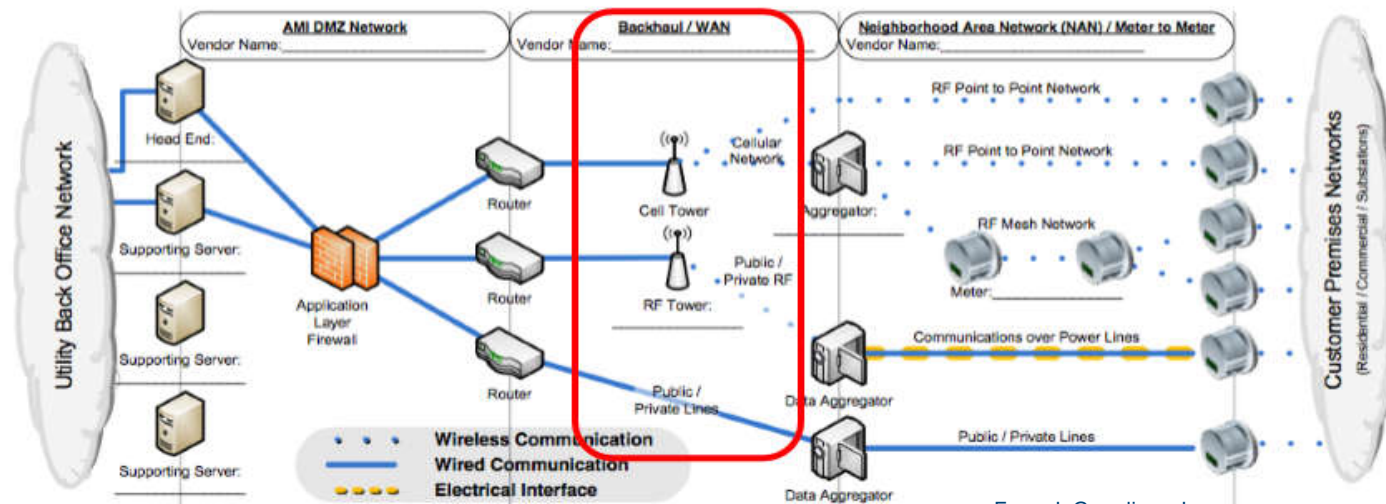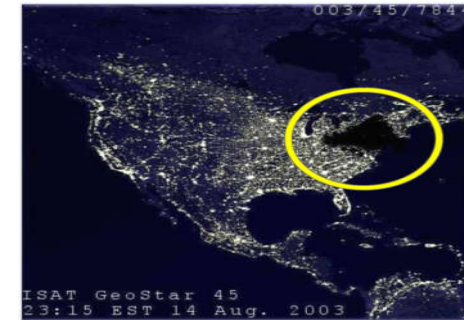


From: InGuardians, Inc.

Advanced Metering Systems – Network security contd.

- Mitigation:

- Engineering teams need to be extended with IT security members – see on the safety example!
- Some kind of transformation solution for requirements between engineering and IT
- Software Development Life-Cycle change
- External entity monitoring security compliance
- Tamper resistance
- VPN/MPLS/overlay networks
- Crypto
- Traffic shaping
- Traffic filtering (e.g. No egress traffic from AMS network or internet from servers)
- Software security analysis (e.g. Monitoring software shall not do modifications)
- External access to production systems, typically services
- Confirmed good implementation of logging
- Avoid «compatibility-solutions», like auth. fallback

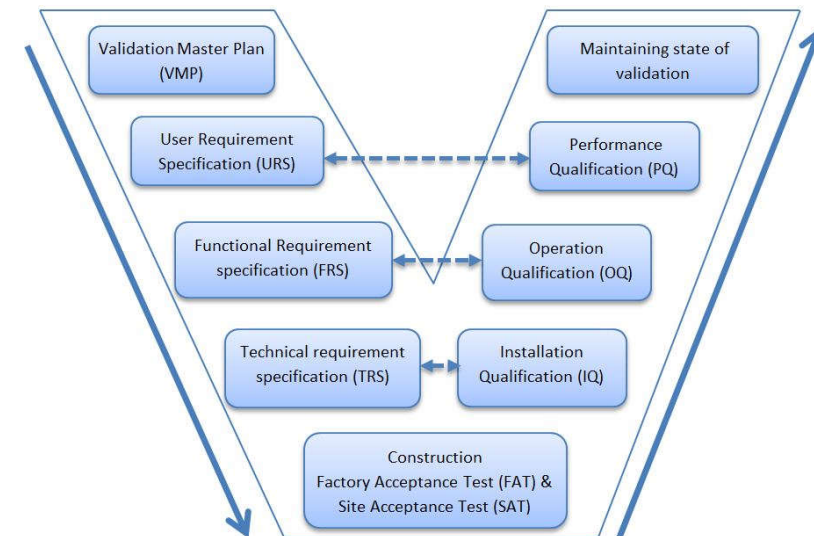

Advanced Metering Systems – Risk management

- Analyze vulnerabilities
 - They are not unique (see L3): CLI, web interface, SQL injection, cross-site request forgery – all the typical things one is getting when testing a web service
- Mitigate risk
 - Again, crypto, but this is not a universal answer
 - Data processing
 - Development and operation life-cycle

A short example



SHODAN kamstrup Q Explore Enterprise Access Contact Us

Exploits Maps

TOP COUNTRIES

Total results: 4
78.79.193.77
host-78-79-193-77.mobileonline.telia.com
TeliaSonera AB
Added on 2017-01-23 05:19:51 GMT
Sweden, Uppsala
Details

South Africa 1
Sweden 1
France 1
Denmark 1

166.159.88.107
107.sub-166-159-88.myvzw.com
Verizon Wireless
Added on 2016-02-03 12:02:59 GMT
United States
Details

166.130.140.13
mobile-166-130-140-13.myvzw.com
AT&T Wireless
Added on 2016-02-02 08:10:04 GMT
United States
Details

63.120.127.26
Georgia Public Web
Added on 2016-02-02 08:10:04 GMT
United States, Sandersville
Details

System Name: CCV 81 77N
Location: Location
Contact: Contact
Pro...

Rugged Operating System v3.9.1 (May 18 2011 09:26)
Copyright (c) RuggedCom, 2008 - All rights reserved

System Name: chakotay
Location: SYNCHRONODE #1
Contact: Kelly McQuig (478-232-7884)

RuggedCom RX1510

RuggedSwitch Operating System v1.6.1
Copyright (c) RuggedCom, 2004 - All rights reserved

HTTP/1.1 302 Moved Temporarily
Connection: Keep-Alive
Keep-Alive: timeout=900
Transfer-Encoding: chunked
Date: Mon, 23 Jan 2017 05:19:41 GMT
Server: Cherokee/0.99.9 (UNIX)
Location: https://78.79.193.77/
X-Powered-By: Cherokee
Set-Cookie:
Ex...

kamstrup

Radio Link Concentrator

Role: Admin
Password: *****
Login

A short example - 2



Alert (ICS-ALERT-16-263-01)

BINOM3 Electric Power Quality Meter Vulnerabilities

Original release date: September 19, 2016

[Print](#) [Tweet](#) [Send](#) [Share](#)

Legal Notice

All information products included in <http://ics-cert.us-cert.gov> are provided "as is" for informational purposes only. The Department of Homeland Security (DHS) does not provide any warranties of any kind regarding any information contained within. DHS does not endorse any commercial product or service, referenced in this product or otherwise. Further dissemination of this product is governed by the Traffic Light Protocol (TLP) marking in the header. For more information about TLP, see <http://www.us-cert.gov/tlp/>.

SUMMARY

NCCIC/ICS-CERT is aware of a public report by Kam Ganeshen of vulnerabilities affecting the BINOM3 Electric Power Quality Meter, a meter designed for autonomous operation in automated systems. According to this report, the vulnerabilities are remotely exploitable. This report was released after the researcher coordinated with ICS-CERT. ICS-CERT has attempted to notify the affected vendor of the report without success. ICS-CERT is issuing this alert to provide early notice of the report and identify baseline mitigations for reducing risks to these and other cybersecurity attacks.

The report included vulnerability details for the following vulnerabilities:

Vulnerability Type	Remotely Exploitable	Impact
Reflected and stored Cross-site Scripting	Yes	Injection of arbitrary Java Script
Clear Text Passwords	Yes	Privileged access to device
Sensitive information leakage in GET request	Yes	Privileged access to device
Access Control Issues	Yes	Password authentication is not enabled on Telnet Access

[More Alerts](#)

SHODAN

BINOM3

Explore

Enterprise Access

Contact Us

Exploits

Maps

TOP COUNTRIES

Total results: 1

213.170.71.188

Quantum CJSC

Added on 2017-02-01 04:46:20 GMT

Russian Federation, Saint Petersburg

Details

Universal multifunctional electric power quality meter BINOM3

MULTIFUNCTIONAL REVENUE ENERGY METER
AND POWER QUALITY ANALYZER



Serial number S/N: 10000034

Authorization

Login:

Password:

Введите, пожалуйста, логин и пароль.

Login

L4 Conclusions



- Converged infrastructure
- IoT expands the attack surface
- Security requirements do also depend on type of data processed
- Devices with multiple interfaces present a risk
- End-to-end security and life-cycle support is key
- Privacy
- Why is this all good for the user?

